



MXG461...

MXF461...



## Modulating control valves PN 16 with magnetic actuators

MXG461...

MXF461...

for chilled and low-temperature hot water systems

- Fast positioning time (< 2 s), high-resolution stroke (1 : 1000)
- Equal-percentage or linear valve characteristic (user-selected)
- High rangeability
- Operating voltage AC 24 V
- Switch-selected control signal DC 0/2...10 V or DC 4...20 mA
- DC 0...20 V phase cut control signal with SEZ91.6 external interface
- Indication of operating state
- Positioning control, position feedback and manual control
- Wear-free inductive stroke measurement
- Fail-safe feature: A → AB closed when de-energised
- Low friction, robust, no maintenance required

### Use

The control valves are mixing or throughport valves. They are supplied with the magnetic actuator ready fitted, equipped with an electronics module for position control and position feedback.

The short positioning time, high resolution and high rangeability make these valves ideal for modulating control of chilled and low-temperature hot water systems in closed circuits of heating, ventilating and air conditioning systems.

Valves for media containing mineral oils: refer to data sheet N4456.

Special silicon-free version available, type suffix ...M.

## Type summary

Type reference	DN	k <sub>vs</sub> [m <sup>3</sup> /h]	Δp <sub>max</sub> [kPa]	Δp <sub>s</sub> [kPa]	S <sub>NA</sub> [VA]	P <sub>med</sub> [W]	I <sub>N</sub> [A]	Wire cross-section [mm <sup>2</sup> ] 4-wire connection 1,5   2,5   4,0 Max. cable length L [m]		
								1,5	2,5	4,0
MX...461.15-0.6	15	0.6	300	300	29	5	3.15	70	110	170
MX...461.15-1.5		1.5								
MX...461.15-3.0		3.0								
MX...461.20-5.0	20	5.0								
MX...461.25-8.0	25	8.0								
MX...461.32-12	32	12								
MX...461.40-20	40	20			44	6	4	40	70	110
MX...461.50-30	50	30								
MXF461.65-50	65	50			46					

... = F for flanged valves  
G for screwed valves

Δp<sub>max</sub> = max. permissible differential pressure across the valve's control path, valid for the entire actuating range of the motorised valve

Δp<sub>s</sub> = max. permissible differential pressure (close off pressure) at which the motorised valve will close securely against the pressure (used as throughport valve)

S<sub>NA</sub> = nominal apparent power for selecting the transformer

P<sub>med</sub> = typical power consumption

I<sub>N</sub> = required slow fuse

k<sub>vs</sub> = nominal flow rate of cold water (5 to 30 °C) through the fully openend valve (H<sub>100</sub>) at a differential pressure of 100 kPa (1 bar)

L = max. cable length; with 4-wire connections, the max. permissible length of the separate 1.5 mm<sup>2</sup> copper positioning signal cable is 200 m

Flanged valves DN80, DN100: M3P80FY, M3P100FY, refer to data sheet N4454

Valves for media containing mineral oils with type suffix ...P (MXG461...P, MXF461...P), refer to data sheet N4456

Silicon-free valves with type suffix ...M (MXG461...M, MXF461...M)

## Accessories

Type reference	Description
ALG...3 (... = DN)	Set of 3 screwed fittings for 3-port valves, consisting of - 3 union nuts - 3 discs and - 3 flat seals
Z155/... (... = DN)	Blank flange set with blank flange, seal, screws, spring washers and nuts
SEZ91.6	External interface for DC 0...20 V phase cut control signal, refer to data sheet N5143

## Order

When ordering, please give quantity, product name and type reference.

Example:  
3 screwed valves MXG461.25-8.0  
3 sets of 3 screwed fittings ALG253  
4 flanged valves MXF461.20-5.0  
2 blank flange sets Z155/20F

## Delivery

Valve body and magnetic actuator form one assembly and cannot be separated.  
The screwed fitting sets and blank flanges are packed and supplied separately.

## Replacement electronics module

ASE1, ASE2

Should the valve electronics prove faulty, the electronics module must be replaced by the ASE1 (DN15...32) or ASE2 (DN40...65) replacement electronics module.

Mounting Instructions no. 35678 are included.

For a detailed description of operation, refer to data sheet CA1N4028E.

**Control operation**

The electronics module converts the positioning signal to a phase-cut power signal which generates a magnetic field in the coil. This causes the armature to change its position in accordance with the interacting forces (magnetic field, counterspring, hydraulics). The armature responds rapidly to any change in signal, transferring the corresponding movement directly to the valve plug, enabling fast changes in load to be corrected quickly and accurately.

The valve's position is measured continuously (inductive). The internal positioning controller balances any disturbance in the system rapidly and delivers the position feedback signal. The valve stroke is proportional to the positioning signal.


**Spring return facility**

If the positioning signal is interrupted, or in the event of a power failure, the valve's return spring will automatically close control path A → AB.


**Control**

The magnetic actuator can be driven by a Siemens controller or a controller of other manufacture that deliver a DC 0/2...10 V or DC 4... 20 mA output signal. To achieve optimum control performance, it is recommended to use a 4-wire connection.


**Operator controls and indicators in the electronics housing**

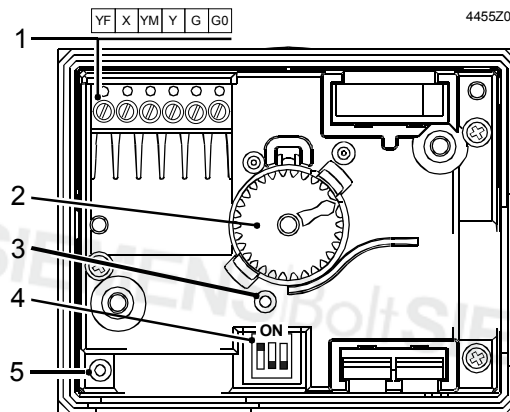

- 1 Connection terminals
- 2 Hand wheel
- 3 Opening for autocalibration
- 4 DIL switch for mode control

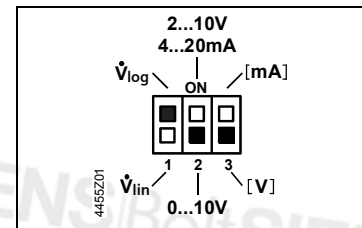

- 5 LED for indication of operating stat

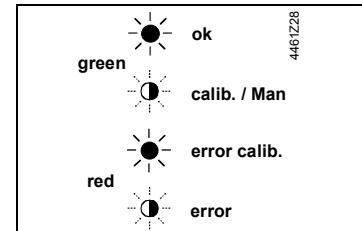

**Indication of operating state**

The two-colour LED display indicating operating status can be viewed by opening the cover of the electronics module.


LED	Indication	Function	Remarks, troubleshooting
Green	Lit	Control mode	Automatic operation; everything o.k.
	Flashing	Calibration In manual control	Wait until calibration is finished (green or red LED will be lit) Hand wheel in MANUAL or OFF position
Red	Lit	Calibration error Internal error	Recalibrate (operate button in opening 1x) Replace electronics module
	Flashing	Mains fault	Check mains network (outside the frequency or voltage range)
Both	Dark	No power supply Electronics faulty	Check mains network, check wiring Replace electronics module

As a general rule, the LED can assume only the states shown above (continuously red or green, flashing red or green, or off).

## Manual control

### MANUAL

The valve control path (ports A → AB) can be opened manually to between 80 and 100% of the full stroke (depending on DN) by pressing the hand wheel inwards and turning it clockwise (MANUAL setting). This disables the control signal from the controller, the green LED is flashing.

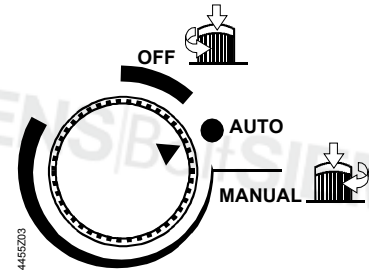

### OFF

To disable automatic control of the valve, press the hand wheel inwards and turn it anti-clockwise (to the OFF position). The valve will close, the green LED is flashing.

### AUTO

For automatic control, the hand wheel must be set to the AUTO position (the hand wheel will spring out), the green LED is lit.

## Calibration


The MX...461... magnetic valves are factory-calibrated at 0 % and 100 % stroke.

When commissioning the valves, however, (especially under extreme conditions of use) there may still be some leakage via control path A → AB with a 0 % stroke control signal (DC 0 V, DC 2 V or DC 4 mA). In this case, the valve can be recalibrated simply and quickly:


1. Hand wheel in AUTO-position
2. Use a pointed implement ( $\varnothing$  2 mm) to operate the button in the opening [3] once
3. While recalibration is in progress, the LED [5] is flashing green for approximately 10 seconds.




The valve will be briefly closed and fully opened.

If the electronics module is replaced, the valve's electronics must be recalibrated. For that, the hand wheel must be set to AUTO.

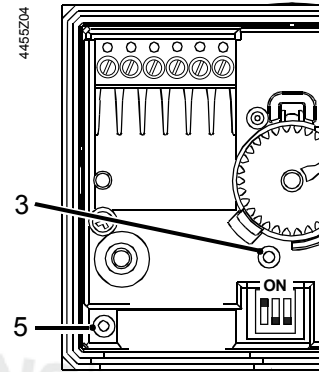





### Configuration DIL switches



Switch	Function	ON / OFF	Description
 1	Valve characteristic	ON	$\dot{V}_{\log}$ (equal percentage) <sup>1)</sup>
		OFF	$\dot{V}_{\text{lin}}$ (linear)
 2	Positioning signal Y	ON	DC 2...10 V, DC 4...20 mA
		OFF	DC 0...10 V <sup>1)</sup>
 3	[V] or [mA] assignment	ON	[mA]
		OFF	[V] <sup>1)</sup>





1) Factory setting

#### Assignment positioning signal Y: Voltage or current

↓ Y	ON 	ON 
ON 	0...10 V	2...10 V
ON 		4...20 mA

4465Z08

#### Selection of valve characteristic (Positioning signal against volumetric flow): Equal-percentage or linear




ON 	ON 
	

4465Z09

### Forced control input

If terminal YF for the forced control input

- is not connected, the valve will follow the Y-signal
- is connected to G, the valve will fully open control path A → AB
- is connected to G0, the valve will close control path A → AB


		YF-Function		
		no function	fully open	closed
Connections		G0 G Y YM X YF	G0 G Y YM X YF	G0 G Y YM X YF
Transfer				

4465Z10

### Signal priority

1. Hand wheel position MANUAL (open) or OFF (close)
2. Forced control signal YF
3. Signal input Y


Flow chart

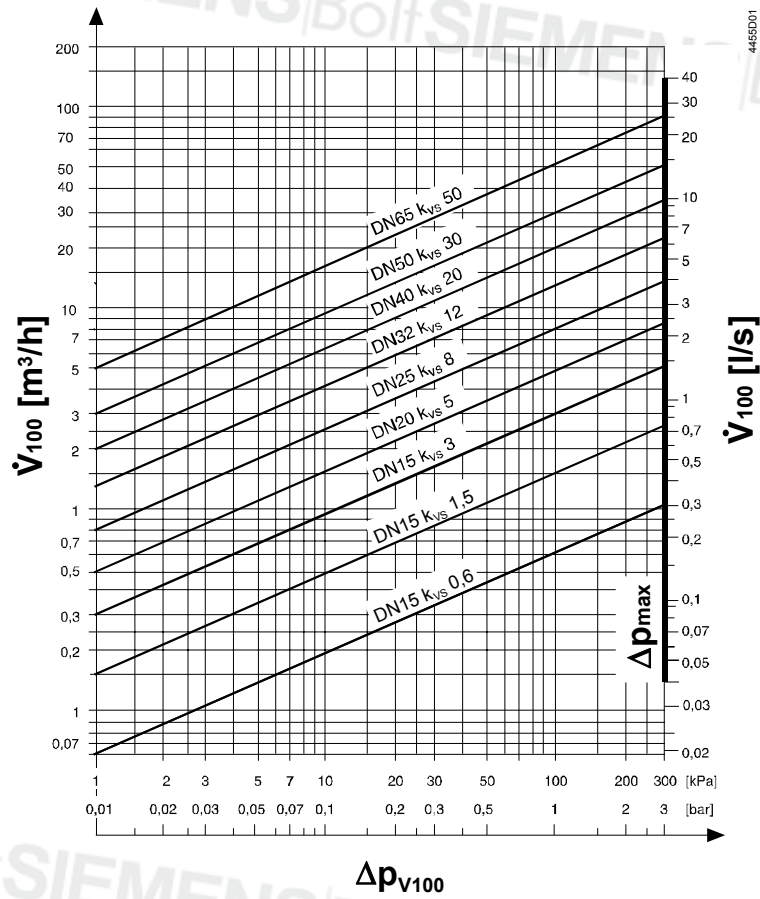


- $\Delta p_{v100}$  = differential pressure across the fully open valve and the valve's control path A → AB by a volume flow  $\dot{V}_{100}$
- $\dot{V}_{100}$  = volume flow through the fully open valve ( $H_{100}$ )
- $\Delta p_{max}$  = max. permissible differential pressure across the valve's control path for the entire actuating range of the motorised valve
- 100 kPa = 1 bar  $\approx$  10 mWC
- 1  $\text{m}^3/\text{h}$  = 0.278  $\text{l/s}$  water at 20 °C

Valve characteristic

Equal percentage

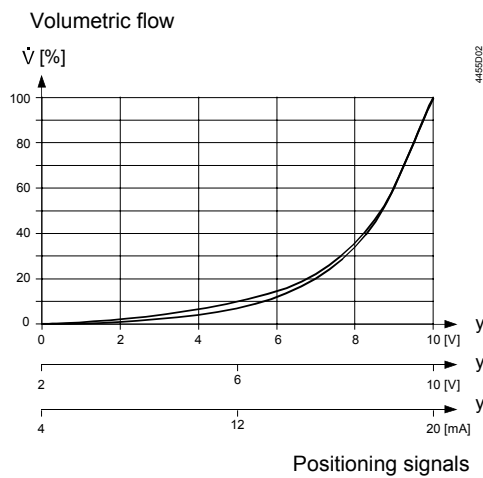


Linear

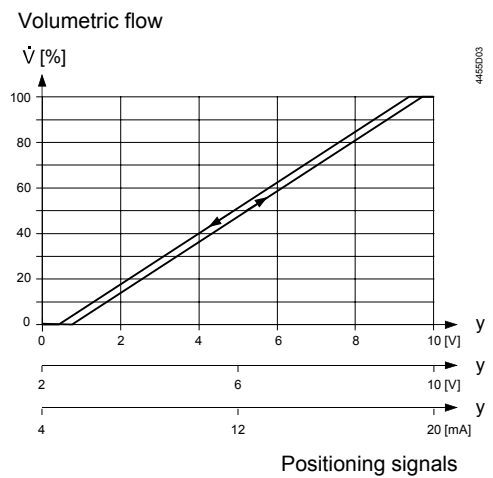


## Mounting notes

Mounting and operating instructions are printed on the actuator and on the electronics module.

**Caution**  **The valve may only be used as a mixing or throughport valve, not as a diverting valve. Observe the direction of flow!**

**A strainer should be fitted upstream of the valve. This increases reliability.**

## Orientation



Degree of protection valid only when M20 cable gland supplied by the installer.

## Access for installation

It is essential to maintain the specified minimum clearance above and to the side of the actuator and/or electronics module! (refer to «Dimensions»)

DN15...DN32 = 100 mm


DN40...DN65 = 150 mm

## Use as straight-through valves

Only three-way MX...461... valves are supplied. They may be used as straight-through valves by closing off port «B».

MXG461... screwed valves in straight-through applications

Port «B» can be sealed with the accessories supplied (cover, gasket) and the union nut of the ALG...3 coupling.




MXF461... flanged valves in straight-through applications

Port «B» can be sealed with part Z155/... which must be ordered as a separate item. The part comes complete with blank flange, seal, screws, spring washers and nuts.

DN15...DN32 blank flange (Z155/15F...Z155/32F)

DN40...DN65 blank flange (Z155/40...Z155/65)

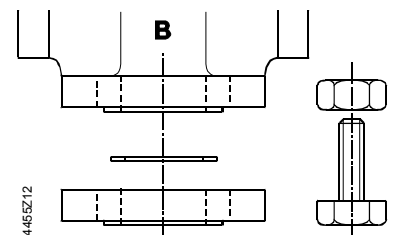

## Installation notes

- The MXG...461... valves are flat-faced allowing sealing with the gaskets provided with the ALG...3 set of 3 screwed fittings.
- Do not use hemp for sealing the valve body threads.
- The actuator may not be lagged.

For notes on electrical installation, see «Connection diagram»

## Maintenance notes

The valves and actuators are maintenance-free.

The low friction and robust design make regular servicing unnecessary and ensure a long service life.

The valve stem is sealed from external influences by a maintenance-free gland.


If the red LED is lit, the electronics must be recalibrated or replaced.

Repair

Should the valve electronics prove faulty, the electronics module must be replaced by the ASE1 (DN15...32) or ASE2 (DN40...65) replacement electronics module. Mounting Instructions no. 35678 are included.

**Caution**  **Always disconnect power before fitting or removing the electronics module.**

After replacing the electronics module, calibration must be triggered in order to optimally match the electronics to the valve (refer to «Calibration»).

**Caution**  **Under operating conditions within the limits defined by the application data, the actuator will become hot, but this does not represent a burn risk. Always maintain the minimum clearance specified, refer to «Dimensions».**

### Disposal



The actuator must not be disposed of together with domestic waste. This applies in particular to the PCB.

Legislation may demand special handling of certain components, or it may be sensible from an ecological point of view

**Current local legislation must be observed.**

## Warranty

Application-specific technical data must be observed.

**If specified limits are not observed, Siemens Switzerland Ltd / HVAC Products will not assume any responsibility.**

## Technical data

### Functional actuator data

Power supply

Extra low-voltage only (SELV, PELV)

Operating voltage AC 24 V +20 / -15 %

Frequency 45...65 Hz

Typical power consumption  $P_{med}$  refer to table «Type summary»

Standby < 1 W (valve closed)

Rated apparent power  $S_{NA}$  refer to table «Type summary»

Required fuse  $I_N$  slow, refer to table «Type summary»

Input

Positioning signal Y DC 0/2...10 V or DC 4...20 mA

Impedance DC 0/2...10 V 100 k $\Omega$  // 5nF

DC 4...20 mA 100  $\Omega$  // 5nF

Forced control

Impedance 22 k $\Omega$

Close valve (YF connected to G0) < AC 1 V

Open valve (YF connected to G) > AC 6 V

No function (YF not wired) positioning signal Y active

Output

Position feedback signal DC 0...10 V; load resistance > 500  $\Omega$

Stroke measurement Inductive

Nonlinearity  $\pm$  3 % of end value



## Functional valve data

PN class	PN 16 to EN 1333
Permissible operating pressure	1 MPa (10 bar)
Differential pressure $\Delta p_{\max} / \Delta p_s$	refer to table «Type summary»
Leakage rate at $\Delta p = 0.1 \text{ MPa (1 bar)}$	A → AB max. 0.02 % $k_{VS}$ (to DIN EN 1349) B → AB depending on operating conditions ( $< 0.2 \text{ % } k_{VS}$ )
Permissible media	chilled and low-temperature hot water, water with anti-freeze; recommendation: water treatment to VDI 2035
Medium temperature	1...130 °C
Valve characteristic <sup>1)</sup>	equal percentage, $n_{gl} = 5.3$ nach VDI / VDE 2173 or linear, optimized near the closing point
Stroke resolution $\Delta H / H_{100}$	1 : 1000 (H = stroke)
Hysteresis	typically 3 %
Mode of operation	modulating
Position when deenergized	A → AB closed
Mounting position	upright to horizontal (note that orientation affects protection standard)
Positioning time	$< 2 \text{ s}$
Materials	
Valve body	Cast iron EN-GJL-250
Plug	CrNi steel (X12CrNiS18 8)
Seat	brass (CuZn39Pb3)
Valve stem seal	EPDM (O-ring)
Bellows	Tombac (CuSn6), bronze (CuSn9), CrNi steel
Electrical connection	
Cable entry	2 x $\varnothing 20.5 \text{ mm}$ (for M20)
Connection terminals	screw terminals for 4 mm <sup>2</sup> wire
Minimal wire cross section	1.5 mm <sup>2</sup>
Maximum cable length	refer to «Type summary»
Dimensions / weight	
Dimensions	refer to « Dimensions»
Weight	refer to « Dimensions»
Norms and standards	
Degree of protection	to IEC 60529
Mounting pos. upright to horizontal	IP54 (with M20 cable gland)
Conforming to	CE requirements UL 873 certified to Canadian standard C22.2 No. 24 C-Tick N 474
Permissible operating pressure	PED 97/23/EC
Pressure accessories	as per article 1, section 2.1.4
Fluid group 2:	<ul style="list-style-type: none"> <li>• DN15...DN50 • without CE-marking as per article 3, section 3 (sound engineering practice)</li> <li>• DN 65 • category I, with CE-marking</li> </ul>
Immunity	Industrial IEC 61000-6-2 <sup>2)</sup>
Immunity (HF)	IEC 1000-4-3; IEC 1000-4-6 (10 V/m)
Emission	Residential IEC 61000-6-3
Emission (HF)	EN 55022, CISPR 22, class B
Vibration <sup>3)</sup>	IEC 68-2-6 (1 g acceleration, 1...100 Hz, 10 min)

<sup>1)</sup> Can be selected via DIL switch


<sup>2)</sup> Transformer 160 VA (e.g. Siemens 4AM 3842-4TN00-0EAO)

<sup>3)</sup> In case of strong vibrations, use high-flex stranded wires for safety reasons.


**General environmental conditions**

	<b>Operation</b>	<b>Transport</b>	<b>Storage</b>
	EN 60721-3-3	EN 60721-3-2	EN 60721-3-1
Climatic conditions	Class 3K5	Class 2K3	Class 1K3
Temperature	-5...+45 °C	-25...+70 °C	-5...+45 °C
Humidity	5...95 % r.h.	5...95 % r.h.	5...95 % r.h.
Mechanical conditions	EN 60721-3-6 Class 6M2		

**Connection diagram**

**Caution**  **If controller and valve receive their power from separate sources, only one transformer may be earthed on the secondary side.**


**With controllers**  
 DC 0...10 V  
 DC 2...10 V  
 DC 4...20 mA

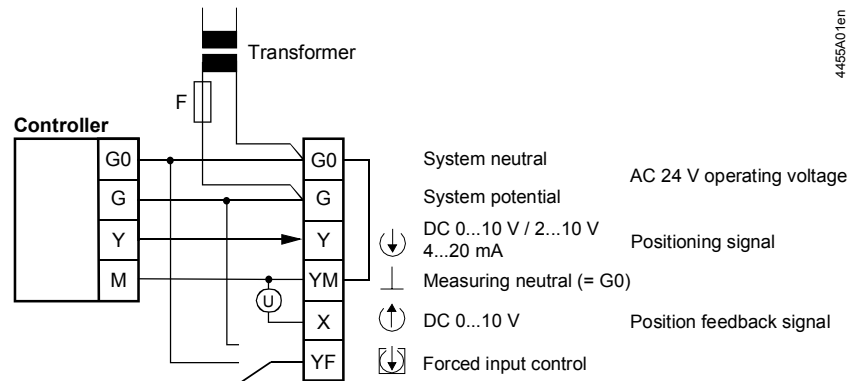


**Application examples**

**Hydraulic circuits**

The examples shown below are basic diagrams with no installation-specific details.

**Caution**  **The valve may only be used as a mixing or throughport valve, not as a diverting valve. Observe the direction of flow!**

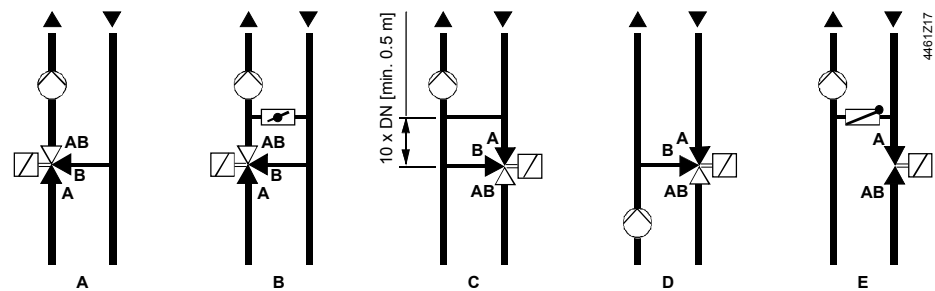


- A Mixing circuit
- B Mixing circuit with bypass (underfloor heating system)
- C Injection circuit
- D Diverting circuit
- E Injection circuit with throughport valve

## Dimensions

Dimensions in mm

**MXG461...  
screwed valves**

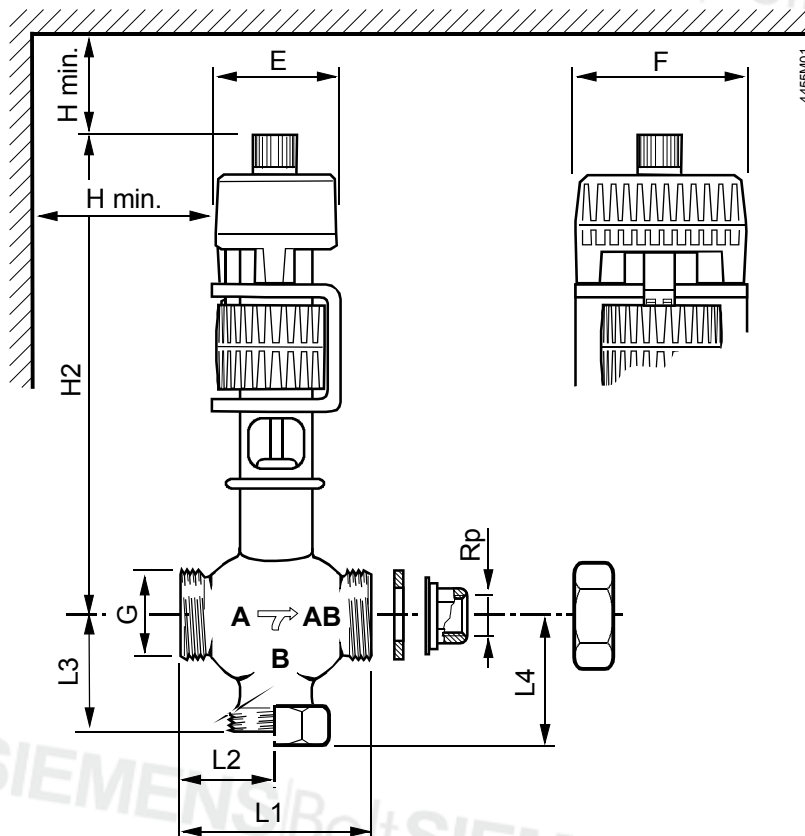


Type reference	DN	Rp [inch]	G [inch]	L1	L2	L3	L4	H2	H min.	E	F	Weight [kg]		
MXG461.15-0.6	15	Rp½	G1B	80	40	42.5	51	240	100	80	100	3.8		
MXG461.15-1.5														
MXG461.15-3.0														
MXG461.20-5.0	20	Rp¾	G1½B	95	47.5	52.5	61	260				150	11.9	4.2
MXG461.25-8.0	25	Rp1	G1½B	110	55	56.5	65	270						4.7
MXG461.32-12	32	Rp1¼	G2B	125	62.5	67.5	76	285						5.6
MXG461.40-20	40	Rp1½	G2½B	140	70	80.5	94	320	9.3					
MXG461.50-30	50	Rp2	G2¾B	170	85	93.5	109	340	11.9					

Remarks:

- L4: When used as a throughport valve
- Internally threaded Rp... to ISO 7-1
- Externally threaded G...B to ISO 228-1
- Fittings to ISO 49 / DIN 2950

**MXF461...  
flanged valves**

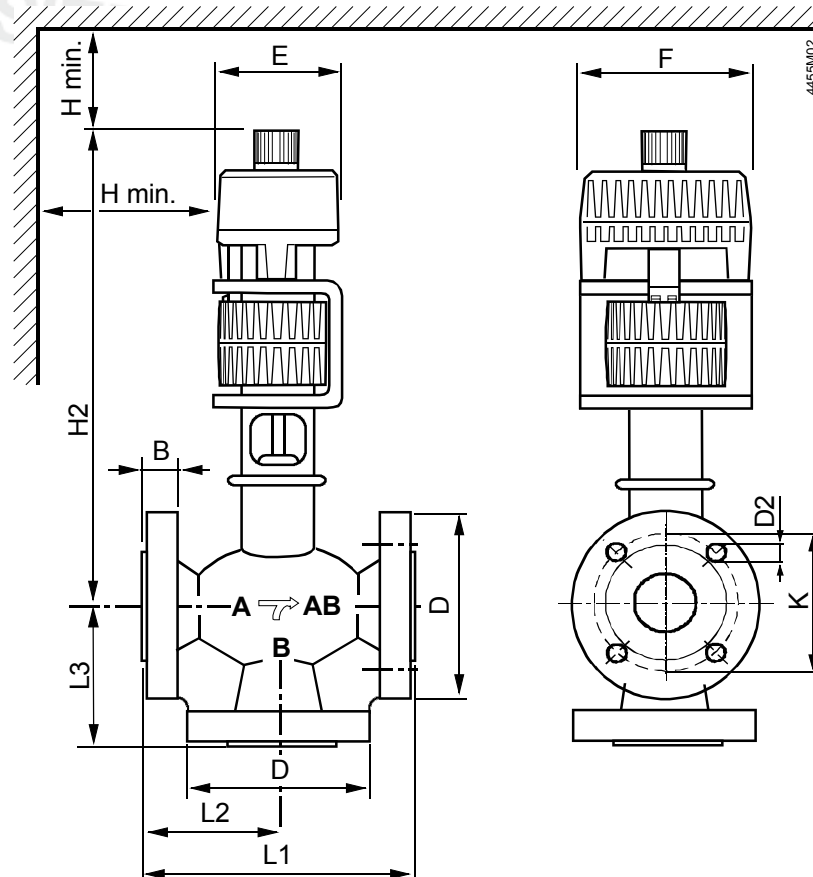

Type reference	DN	B	D ∅	D2 ∅	K	L1	L2	L3	H2	H min.	E	F	Weight [kg]
MXF461.15-0.6	15	14	95	4x14	65	130	65	65	250	100	80	100	5.8
MXF461.15-1.5													
MXF461.15-3.0													
MXF461.20-5.0	20	16	105	4x14	75	150	75	75	260	100	80	100	7.0
MXF461.25-8.0			25		115	85	160	80	80				272
MXF461.32-12	32	18	140	4x18	100	180	90	90	285	150	80	100	11.0
MXF461.40-20			40		150	110	200	100	100				322
MXF461.50-30	50	22	165	4x18	125	230	115	105	340	150	80	100	19.8
MXF461.65-50			65		185	145	290	145	125				392

Remarks:

- Counter-flanges must be supplied by the installer!
- Flange dimensions to ISO 7005-2 / DIN 2533, PN 16